

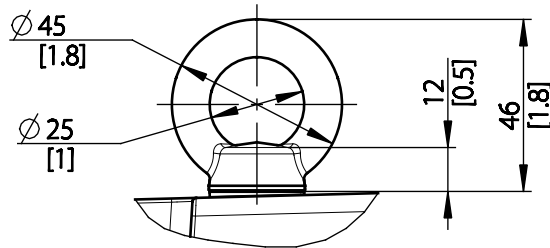



Type	Value
Max Weight	65 kg / 143 lb
IP Class	IP21
Nema Class	Type 1

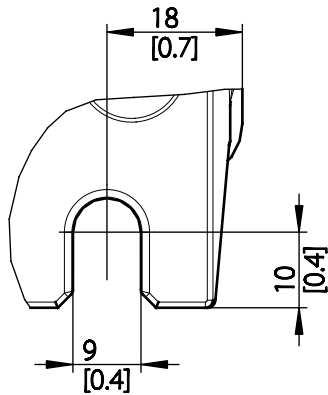




DETAIL C
SCALE 1:2



DETAIL B
SCALE 1:1

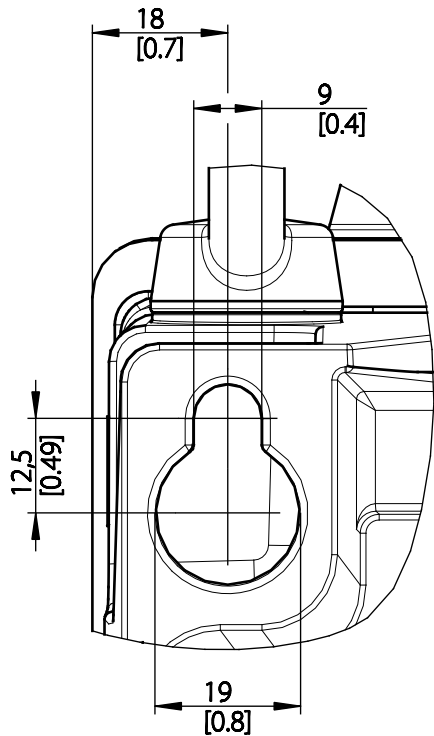




DETAIL A
SCALE 1:1

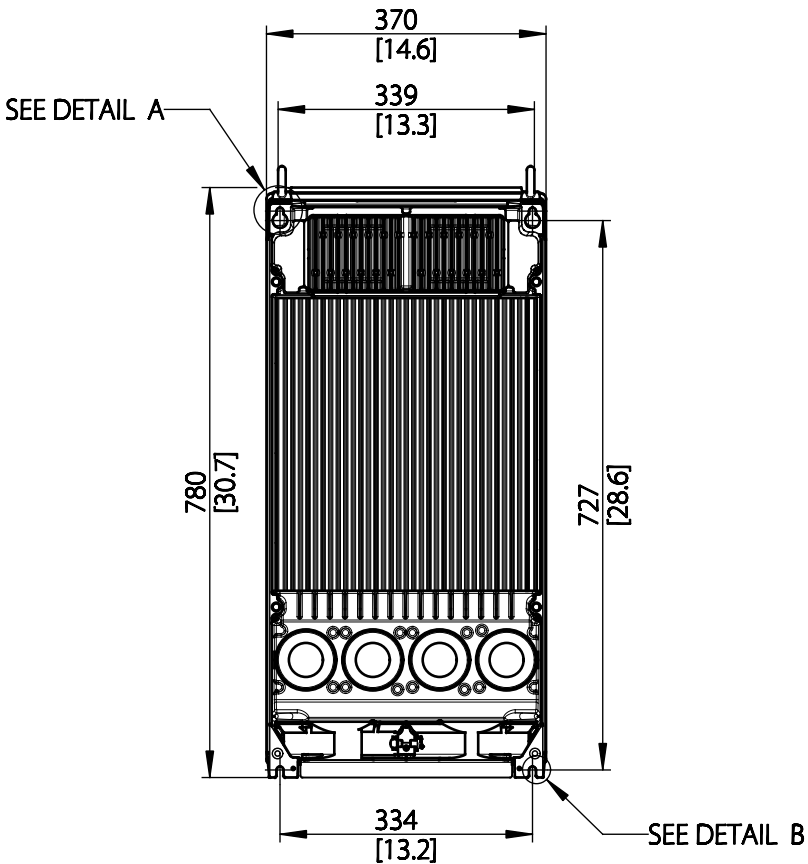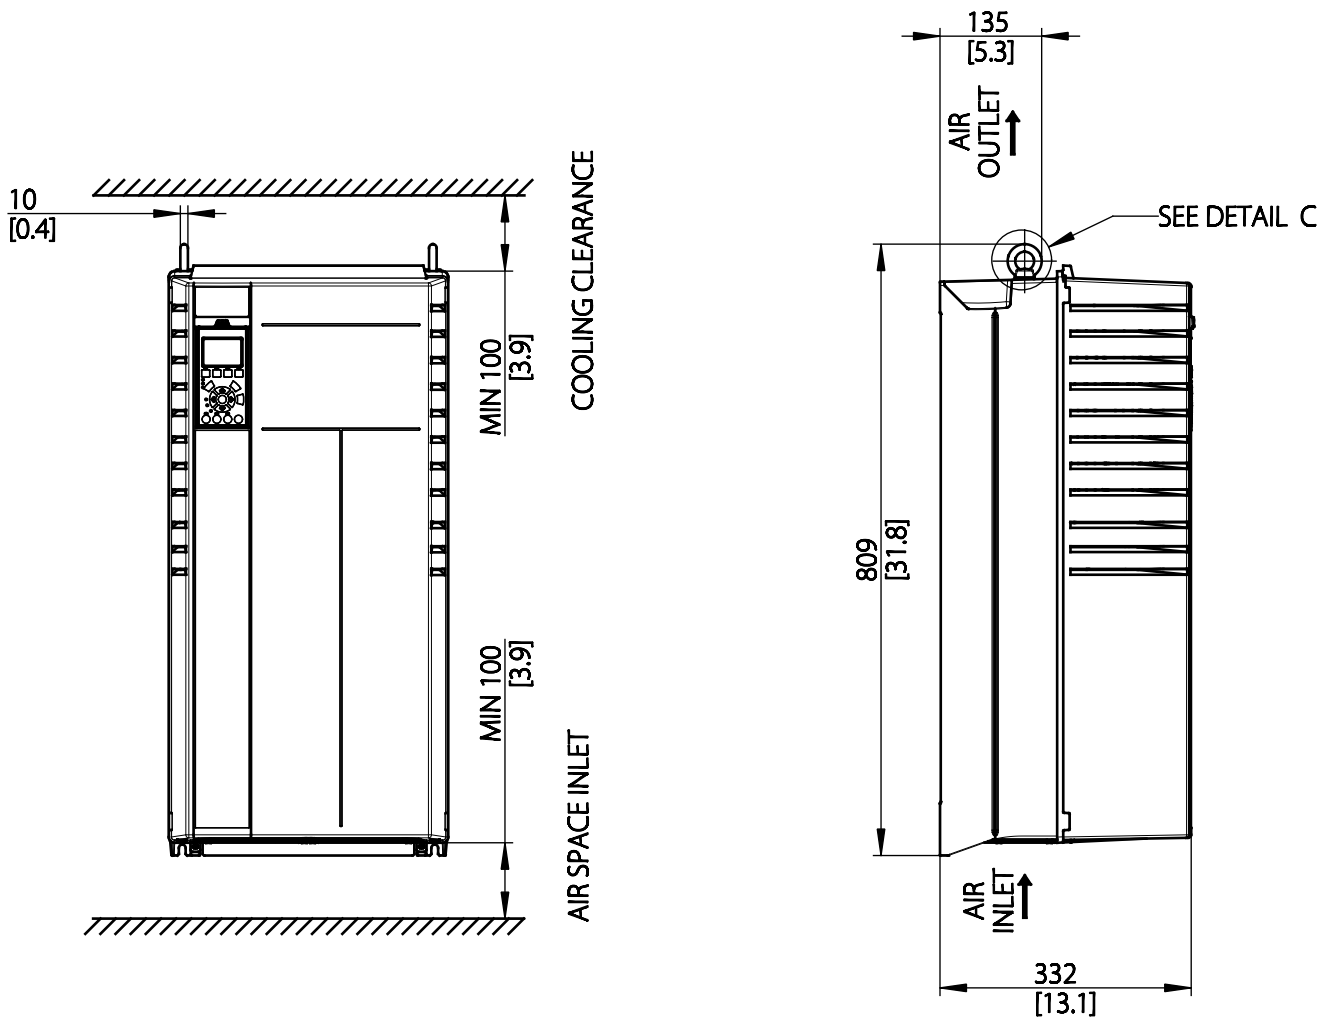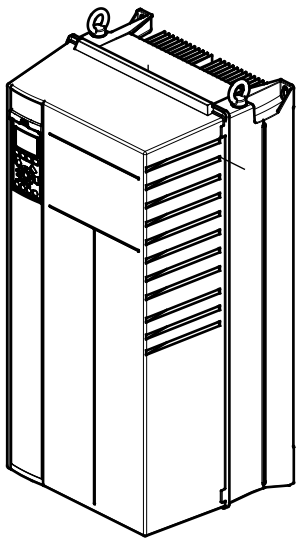

THIS DRAWING SHOWS THE MOST COMMON VERSION OF THIS PRODUCT VARIANT.
SMALL DIFFERENCES MAY OCCUR DEPENDING ON THE FINAL PRODUCT CONFIGURATION.

CENTER OF GRAVITY:
FOR REFERENCE ONLY, THE PRODUCT CONFIGURATION MAY INFLUENCE THE CG IN ALL THREE AXES.

UNLESS OTHERWISE SPECIFIED THE TOLERANCE IS ±1MM (0,4 INCH). ALL DIMENSIONS ARE IN MILLIMETERS (INCH)			FIRST ANGLE PROJECTION		SCALE 1:10	SIZE A3	MATERIAL		
							FINISH		
							DESCRIPTION MCAD FC C2 IP21 WO DISCONNECT		
CHANGED DESIGNED CHECKED Danfoss 2015-04-23 									
PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.							DRAWING NUMBER MCAD-FC-C2-IP21-WO-DISCONNECT		REV P1
							MODEL C2-CUSTOMER-DRAWING		SHEET 1 OF 2

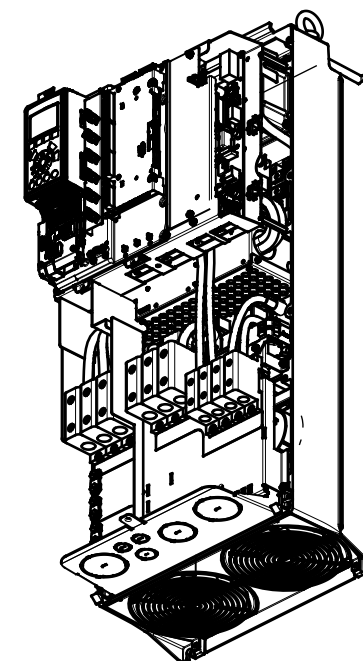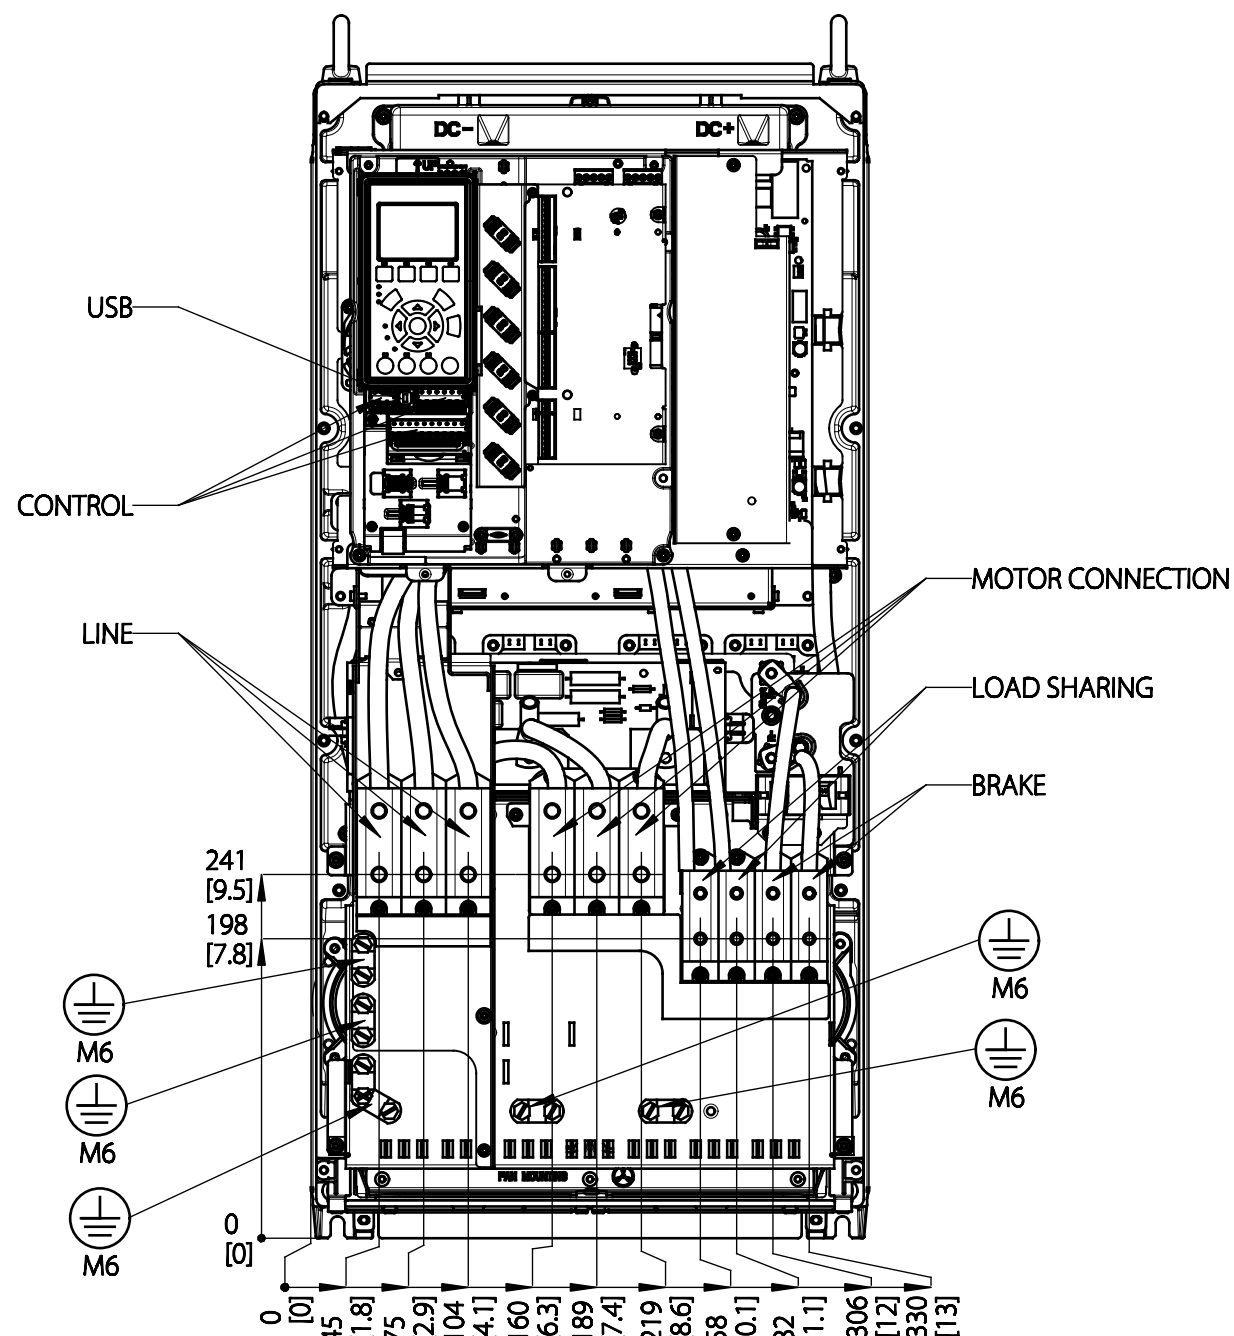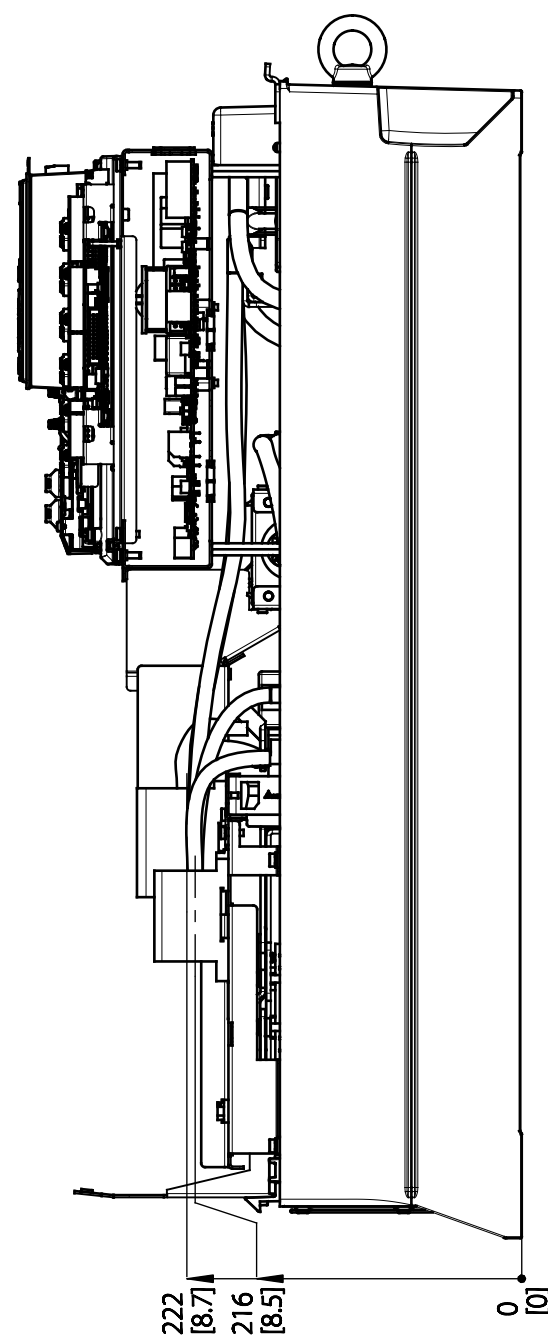

THIS DRAWING SHOWS THE MOST COMMON VERSION OF THIS PRODUCT VARIANT.
SMALL DIFFERENCES MAY OCCUR DEPENDING ON THE FINAL PRODUCT CONFIGURATION.

PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. TWO OR THREE DIMENSIONAL
REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.

DRAWING NUMBER
MCAD-FC-C2-IP21-WO-DISCONNECT
MODEL
C2-CUSTOMER-DRAWING

REV
P1
SHEET
2 OF 2